


TREE PRESERVATION DETAIL



GUIDELINES

1. Erect fence barriers around all "saved" trees near the construction activity.
2. Fence multiple trees together when possible.
3. Fence barriers shall be placed outside the drip line and as far from the tree as construction permits.
4. Fence posts shall be placed no further than 15 feet apart.
5. No staging of material or grading shall occur within the fenced tree preservation area.

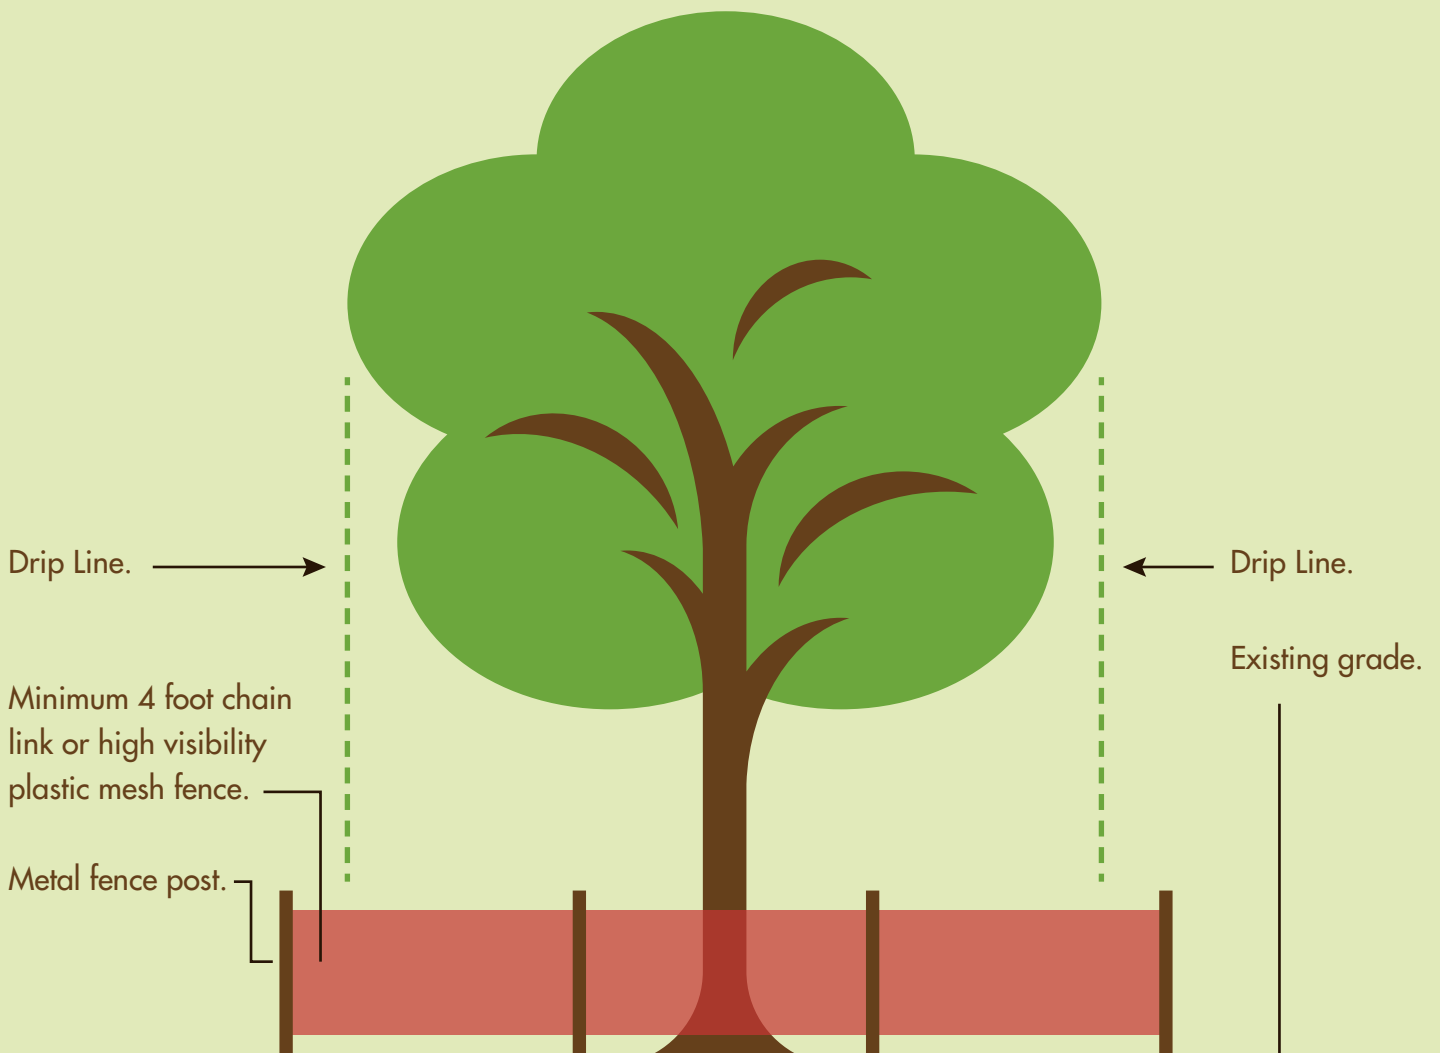